

# READY MIXED CONCRETE BATCHING PLANTS MANUFACTURER

Henan Camelway Machinery Manufacture Co., Ltd., formerly known as "XINGYANG County Zhongyuan Construction Machinery Factory", was established in 1983. Over 30 years' development, Camelway has grown into a well-known solutions providers of concrete production and aggregate production. Camelway HZS series batching plants and WBZ series continuous mixing plants not only participated in witnessing China development of infrastructure construction, but exported to overseas. At the same time, our equipment is trusted by many foreign construction contractors. With excellent product quality and after-sales service, Camelway's products and services quickly cover more than 100 countries and regions around the world. We look forward to working with you in your next project.



## **Concrete Batching Plant Catalogue**

#### STATIONARY TYPE CONCRETE BATCHING PLANT:

• SKIP HOSIT CONCRETE MIXING PLANT:

HZS25

HZS35

HZS50

HZS75

- BELT CONVEYOR DELIVERY CONCRETE BATCHING PLANT:
  - HZS60

HZS90

HZS120

HZS150

HZS180

#### **MOBILE TYPE CONCRETE BATCHING PLANT:**

• YHZS25/YHZS35/YHZS50/YHZS60/YHZS75



### SKIP HOIST- HZS25 CONCRETE MIXING PLANT



Model-HZS25	
Capacity	25M3/H
Concrete Mixing System	JS500, 1 Unit
Aggregate Batcher Machine	PLD800-2/3
Weighing System	Water, Cement By Force Sensor
Control System	Central Control, Manual Operation
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	30T/50T Cement Silo, Screw Conveyor
Power	45kw
Package	2x40HQ Containers
Delivery Time	7 working days



#### SKIP HOIST- HZS35 CONCRETE MIXING PLANT



Model-HZS35	
Capacity	35M3/H
Concrete Mixing System	JS750
Aggregate Batcher Machine	PLD1200-3
Weighing System	Water, Cement, Additive By Force Sensor
Control System	Central Control, Manual Operation
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	50T Cement Silo, Screw Conveyor
Power	55kw
Package	2x40HQ Containers



**Delivery Time** 

7 working days

#### **SKIP HOIST- HZS50 CONCRETE MIXING PLANT**



Model-HZS50	
Capacity	50M3/H
Concrete Mixing System	Twins Shaft Concrete Mixer, JS1000, 1 Unit
Aggregate Batcher Machine	PLD1600-3/4
Weighing System	Water, Cement, Additive By Force Sensor
Control System	Automatic Control, Manual/Computer Operate
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	50/80T Cement Silo, Screw Conveyor
Power	65kw
Package	3x40HQ Containers



**Delivery Time** 

10 working days

#### SKIP HOIST- HZS75 CONCRETE MIXING PLANT



Model-HZS75	
Capacity	75M3/H
Concrete Mixing System	Twins Shaft Concrete Mixer, JS1500, 1 Unit
Aggregate Batcher Machine	PLD2400-3/4
Weighing System	Water, Cement, Additive By Force Sensor
Control System	Automatic Control, Manual/Computer Operate
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	50/100T Cement Silo, Screw Conveyor
Power	75kw



Package	4x40HQ Containers
Delivery Time	10-12 working days

#### **BELT CONVEYOR – HZS60 CONCRETE BATCHING PLANT**




#### Model-HZS60

Capacity	60M3/H
Concrete Mixing System	JS1000
Aggregate Batcher Machine	PLD1600/2400-3
Weighing System	Water, Cement, Additive By Force Sensor
Control System	Automatic Control, Manual/Computer Operate
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	100T Cement Silo, Screw Conveyor
Power	87kw



Package	4x40HQ Containers
Delivery Time	10-12 working days

#### **BELT CONVEYOR – HZS90 CONCRETE BATCHING PLANT**

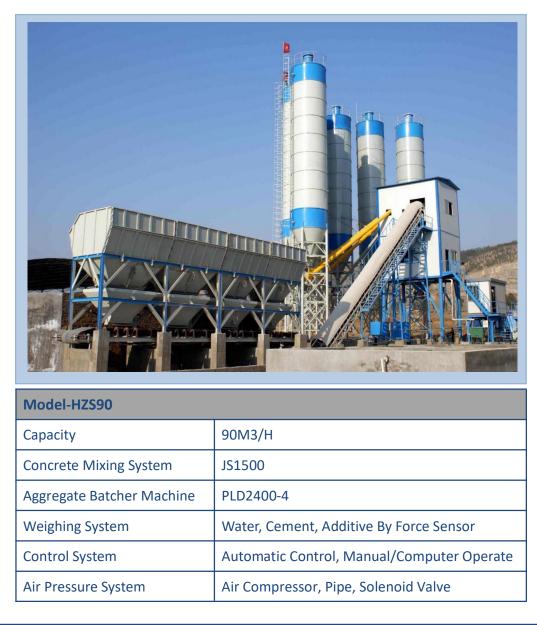



Optional Part	100T Cement Silo, Screw Conveyor
Power	115kw
Package	6x40HQ Containers
Delivery Time	20 working days

#### **BELT CONVEYOR – HZS120 CONCRETE BATCHING PLANT**




Model-HZS120	
Capacity	120M3/H
Concrete Mixing System	YJS2000
Aggregate Batcher Machine	PLD3200-4
Weighing System	Water, Cement, Additive By Force Sensor
Control System	Automatic Control, Manual/Computer Operate
Air Pressure System	Air Compressor, Pipe, Solenoid Valve



Optional Part	200T Cement Silo, Screw Conveyor
Power	145kw
Package	9x40HQ Containers
Delivery Time	25 working days

#### **BELT CONVEYOR – HZS150 CONCRETE BATCHING PLANT**

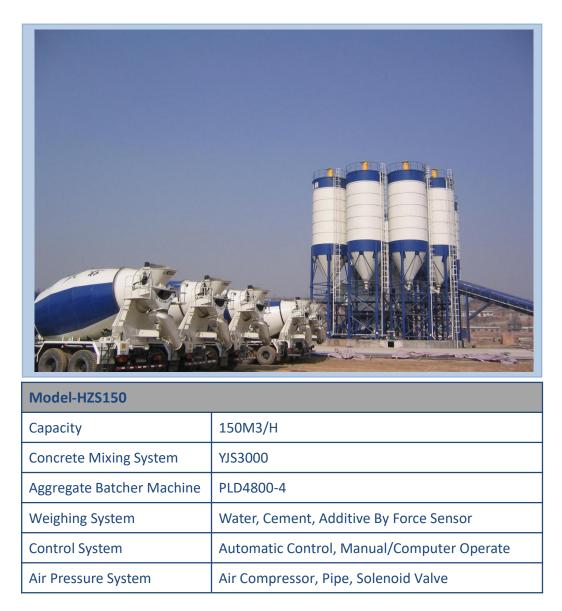



Optional Part	200T Cement Silo, Screw Conveyor
Power	175kw
Package	12x40HQ Containers
Delivery Time	30 working days

#### **BELT CONVEYOR – HZS180 CONCRETE BATCHING PLANT**





Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	200T Cement Silo, Screw Conveyor
Power	205kw
Package	14x40HQ Containers
Delivery Time	35 working days

#### **MOBILE TYPE – YHZS25 CONCRETE MIXING PLANT**



Model-YHZS25	
Capacity	25M3/H
Concrete Mixing System	JS500
Aggregate Batcher Machine	4x3M <sup>3</sup>
Weighing System	Water, Cement, Additive By Force Sensor



Control System	Automatic Control, Manual/Computer Operate
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	50T Cement Silo, Screw Conveyor
Power	40kw
Package	2x40HQ Containers
Delivery Time	20 working days

#### **MOBILE TYPE – YHZS35 CONCRETE MIXING PLANT**





Weighing System	Water, Cement, Additive By Force Sensor
Control System	Automatic Control, Manual/Computer Operate
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	100T Cement Silo, Screw Conveyor
Power	50kw
Package	2x40HQ Containers
Delivery Time	20 working days

#### **MOBILE TYPE – YHZS50 CONCRETE BATCHING PLANT**



Model-YHZS50	
Capacity	50M3/H
Concrete Mixing System	JS1000
Aggregate Batcher Machine	4x5M <sup>3</sup>

HENAN Camelway Machinery Manufacture Co,. LTD Mob: +86 18838109566 www.camelway.com 14/15



Weighing System	Water, Cement, Additive By Force Sensor
Control System	Automatic Control, Manual/Computer Operate
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	100T Cement Silo, Screw Conveyor
Power	68kw
Package	3x40HQ Containers
Delivery Time	25 working days

#### **MOBILE TYPE – YHZS60 CONCRETE BATCHING PLANT**



Model-YHZS60	
Capacity	60M3/H



Concrete Mixing System	JS1000
Aggregate Batcher Machine	4x6M <sup>3</sup>
Weighing System	Water, Cement, Additive By Force Sensor
Control System	Automatic Control, Manual/Computer Operate
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	100T Cement Silo, Screw Conveyor
Power	98kw
Package	3x40HQ Containers
Delivery Time	25-30 working days

#### **MOBILE TYPE – YHZS75 CONCRETE BATCHING PLANT**



HENAN Camelway Machinery Manufacture Co,. LTD Mob: +86 18838109566 www.camelway.com 16/15



Concrete Mixing System	JS1500
Aggregate Batcher Machine	4X8M3
Weighing System	Water, Cement, Additive By Force Sensor
Control System	Automatic Control, Manual/Computer Operate
Air Pressure System	Air Compressor, Pipe, Solenoid Valve
Optional Part	100T Cement Silo, Screw Conveyor
Power	115kw
Package	4x40HQ Containers
Delivery Time	30 working days